

TECHNICAL SPECIFICATION: REBARS ALFA 500S



Description of the product

Weldable, sustainable reinforcing steel featuring improved bonding and high ductility, hot rolled with in-line heat treatment “Tempcore”.

Range of dimensions

- Diameter: **8 – 32 mm**
- Length: **6 – 18 m**

Packaging

- 5 fastenings for bundle length < 9 m:
- 7 fastenings for bundle length 9 to 14 m
- 9 fastenings for bundle length 15 m
- 11 fastenings for bundle length 16 to 18 m

Double-strap fastening with 7 mm diameter wire

Bundle weight:

- **6 m ~ 1400 kg**
- **12 m ~ 2300 kg**

Labelling

Each bundle is identified with a metal or paper plastic label containing the following information:

- Company logo
- Heat number
- Diameter
- Length
- Weight
- Steel grade
- Production date
- Standards references
- Certification logos
- QR Code


TECHNICAL SPECIFICATION: REBARS ALFA 500S



Certifications

Each delivery is accompanied by the certificate 3.1 (standard UNI EN 10204)

RIBS GEOMETRY AND ROLLING MARKING

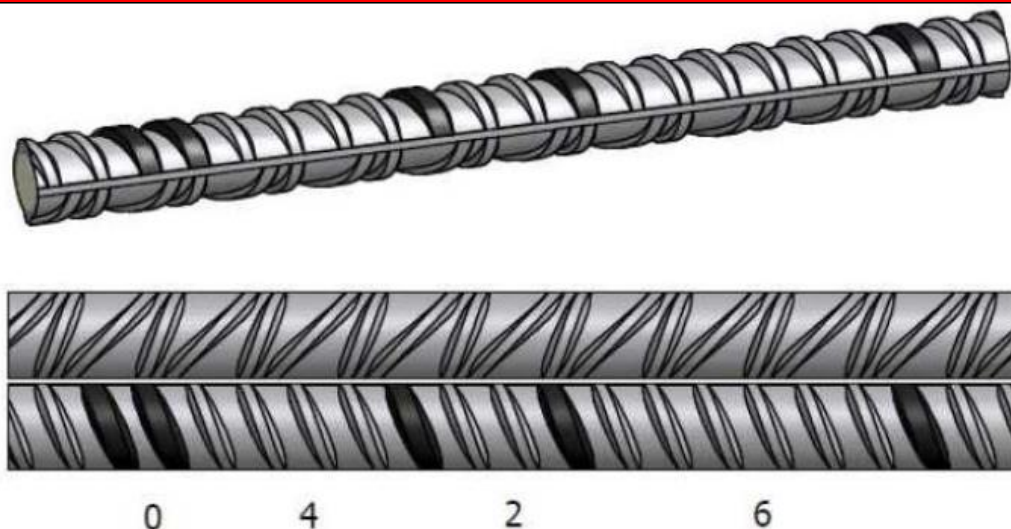

CONFORMITY TO STANDARDS

Country	Standard	Grade	Certifications
ITALY	D.M. 17/01/2018	B 450 C	✓
FRANCE	NFA 35080/1	B 500 B	✓
GERMANY	DIN 488	B 500 B	✓
ROMANIA	ST 009	B 500 C	✓
CZECH REP.	DIN 488	B 500 B	✓
HUNGARY	DIN 488	B 500 B / B 500 C	✓
SLOVAKIA	DIN 488	B 500 B	✓
SWITZERLAND	SIA 262	B 500 B	✓
SLOVENIA	SIST EN 10080	B 500 B	✓
CROATIA	HRN 1130-2	B 500 B	✓
SERBIA	SRPS EN 10080	B 500 B	✓
POLAND	IBDiM-KOT-2022/0813	B 500 C	✓
BULGARIA	BDS 9252:2007	B500B - B500C	✓
SPAIN	UNE 36068	B 500 S	
UNITED KINGDOM	BS 4449	B 500 B	
PORTUGAL	LNEC E450	A 500 NR	
USA	ASTM A615 / A705	GRADO 60 / 40	

CHEMICAL COMPOSITION

C % max	P % max	S % max	Cu % max	N % max	Ceq. Max
0.22	0.050	0.050	0.80	0.012	0.50
(0.24)	(0.055)	(0.055)	(0.85)	(0.014)	(0.52)

The figures in brackets refer to product analysis

TECHNICAL SPECIFICATION: REBARS ALFA 500S



MECHANICAL PROPERTIES							
Standard	Grade	Re N/mm ²	Rm N/mm ²	Rm/Re	Agt %	A5 %	A10 %
D.M. 17/01/2018	B450 C	≥ 450	≥ 540	≥ 1.15 ≤ 1.35	≥ 7.5		
NFA 35080/1	B 500 B	≥ 500		≥ 1.08	≥ 5		
SIA 262	B 500 B	≥ 500		≥ 1.08	≥ 5		
DIN 488	B 500 B	≥ 500		≥ 1.08	≥ 5		
ST 009	B 500 C	≥ 500		≥ 1.15 ≤ 1.35	≥ 7.5		≥ 16
HRN 1130-2	B 500 B	≥ 500		≥ 1.08	≥ 5		
EN 10080	B 500 B	≥ 500		≥ 1.08	≥ 5		
IBDiM-KOT-2022/0813	B 500 C	≥ 500		≥ 1.15 ≤ 1.35	≥ 8		
BDS 9252:2007	B500B - B500C	≥ 500		≥ 1.15 ≤ 1.35	≥ 7.5		
UNE 36068	B 500 S	≥ 500		≥ 1.08	≥ 5		
BS 4449	B 500 B	≥ 500		≥ 1.08	≥ 5		
LNEC E450	A 500 NR	≥ 500		≥ 1.08	≥ 5		
ASTM A615	GR. 60	≥ 420	≥ 620	≥ 1.10			≥ 9

GEOMETRICAL CHARACTERISTICS				
Ø mm	8	10	12	≥ 14
Relative rib area fR	≥ 0.040	≥ 0.040	≥ 0.040	≥ 0.056
Relative rib area fR DIN 488	≥ 0.045	≥ 0.052	≥ 0.056	≥ 0.056